

DESIGN APPLICATION

Docket No.: 27889-00037

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: OVERTON L. PARISH
ROGER S. DEVILBISS

jc518 U.S. PTO
09/328183
06/08/99

For: COOLING APPARATUS HAVING LOW
PROFILE EXTRUSION AND METHOD
OF MANUFACTURE THEREFOR

BOX PATENT APPLICATION
To the Honorable Assistant
Commissioner of Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. **EL269318902US**

Date of Deposit: **June 8, 1999**

I hereby certify that the paper(s) and/or fee(s) listed below
are attached hereto and are being deposited with the U.S. Postal
Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 on the date indicated above and is addressed to the
Assistant Commissioner of Patents, Washington, D.C. 20231

Type or Print Name: CAROL WOODS

Carol A Woods
.....
Signature

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

1. (XX) The specification of the above-referenced patent application is
enclosed herewith (23 pages including Claims and Abstract).
2. (XX) 6 sheet(s) of:
X informal drawing(s) is (are) enclosed herewith.
 formal drawing(s) is (are) enclosed herewith.
3. (XX) This application is a:
X Continuation
 Divisional
 Continuation-In-Part

of prior copending parent application

Serial No. 60/088,428 filed on 06/08/98, now pending.

Please amend the application to insert the following line in the
beginning of the specification:

--This application is a Continuation of prior
application Serial No. 60/088,428 filed on 06/08/98, now
pending.--

In the event that a petition to extend time under 37 CFR 1.136 is
necessary in the parent application to maintain copendency for this
application, a petition for an extension of the necessary time to
maintain copendency is hereby requested for the parent application
and the Commissioner is hereby authorized to debit our Account Number
10-0447 for the necessary fees.

4. () The fees for this application have been calculated and included as shown below (Prior to calculating the fees, please enter any enclosed preliminary amendment.):

FEE FOR	UTILITY APPLICATION			OR	DESIGN APPLICATION		
	NO. CLAIM(S)	SMALL ENTITY	LARGE ENTITY		SMALL ENTITY	LARGE ENTITY	
BASIC FEE		\$395	\$790.00		\$165.00	\$330.00	
INDEP. CLAIMS	___ - 3 = ___ x 41 = \$		OR ___ x 82 = \$				
TOTAL CLAIMS	___ - 20 = ___ x 11 = \$		OR ___ x 22 = \$				
MULT DEPEND		+ 135 = \$	OR + 270 = \$				
TOTAL FILING FEES		\$	\$	OR	\$ 165.00	\$	

___ A check(s) in the amount of \$395.00 is enclosed herewith. Please charge any deficiency or credit any overpayment to Deposit Account No. _____.

___ Please charge my Deposit Account No. _____ in the amount of \$_____. Please charge any deficiency or credit any overpayment to Deposit Account No. _____.

5. () An oath or declaration is enclosed herewith that is:

___ Newly executed per 37 CFR 1.63(a) and (b).
 ___ A copy of the executed declaration filed in the prior application upon which priority is based, showing the signature or an indication thereon that it was signed; and:

___ This application is being filed fewer than all of the inventors named in the prior application and it is requested that the following name or names be deleted from the list of inventors in the prior application for this continuation or divisional application:

___ The prior application was accorded status under 37 CFR § 1.47 and is accompanied by:

___ A copy of the decision granting a petition to accord Sec. 1.47 status to the prior application (unless all of the inventors have or legal representatives have filed an oath or declaration to join in the prior application).

___ A copy of the subsequently executed oath(s) or declaration(s) filed by the inventor(s) or legal representative(s) that have subsequently joined in the prior application.

6. () The power of attorney for this application:

___ is appointed in the newly executed Oath or Declaration submitted herewith.
 ___ is appointed by the power of attorney enclosed herewith.
 ___ remains the same as originally in the parent application.
 ___ was changed during the prosecution of the parent application and a copy of the change in the power of attorney is enclosed herewith.

7. (XX) The correspondence address for this application shall be:

Stanley R. Moore
Jenkins and Gilchrist, P.C.
3200 Fountain Place
1445 Ross Ave.
Dallas, Texas 75202

- X which is a new correspondence address or a change therein.
___ which is the same as originally in the parent application.
___ which is the change in the correspondence address that was
filed during the prosecution of the parent application.

8. () Priority is hereby claimed under 35 USC 119 and 172 to the following
foreign applications:

Country	Serial No.	Date
_____	_____	_____
_____	_____	_____
_____	_____	_____

and:

- ___ A certified copy of each application is enclosed herewith.
___ A certified copy of each application was filed in prior
application Serial No. _____.

9. () A verified statement claiming small entity status under 37 CFR 1.9
and 1.27:

- ___ is enclosed herewith.
___ was filed in parent application Serial No. _____, and
such status remains unchanged and is requested for this
application.

10. () A preliminary amendment is enclosed herewith.

11. () An Information Disclosure Statement with Modified PTO Form 1449 and
a copy of the cited references are enclosed herewith.

12. () An Assignment of the invention to _____
with cover sheet and recordation fee is enclosed herewith for
recordation by the Assignment Branch.

13. (XX) The Commissioner is hereby authorized to charge payment, or to
credit any overpayment, of the following fees associated with this
filing or during the pendency of this application to Deposit Account
No. 10-0447.


- ___ Any patent application filing fees under 37 CFR 1.16.
X Any patent application processing fees under 37 CFR 1.17.
___ The issue fee under 37 CFR 1.18 at or before mailing of the
Notice of Allowance, pursuant to 37 CFR 1.311(b).

14. () Other (specify): _____

_____.

15. (XX) Confirmation Postcard.

Respectfully submitted,

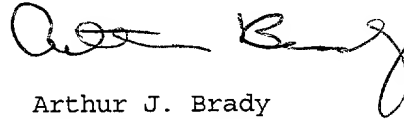

Arthur J. Brady
Reg. No. 42,356

Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
(214) 855-4182

2025 RELEASE UNDER E.O. 14176

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No.: EL269318902US

Date of Deposit: JUNE 8, 1999

I hereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231

Signature



CAROL WOODS

COOLING APPARATUS HAVING LOW PROFILE
EXTRUSION AND METHOD OF MANUFACTURE THEREFOR

Applicants: OVERTON L. PARISH
ROGER S. DeVILBISS

BACKGROUND

5 The present invention generally pertains to cooling apparatus, and more particularly, but not by way of limitation, to cooling apparatus using "low profile extrusions". As is explained in greater detail hereinbelow, such apparatus are extremely useful in printed circuit board (PCB) level cooling of electronic components, and for use as heat exchangers in applications where space is limited and/or low weight is critical. The present invention also pertains

to an improved, high volume apparatus and method for manufacturing extruded hollow tubes for heat exchangers and heat pipes, including "low profile extrusions".

As used in this document, the term "low profile
5 extrusion" refers to a heat exchange apparatus comprising an integral piece of metal having a series of micro extruded hollow tubes formed therein for containing a fluid. The low profile extrusions preferably have multi-void micro extruded tubes designed to operate under the pressures and temperatures
10 required by modern environmentally safe refrigeration gases and to resist corrosion.

The micro extruded tubes are preferably interconnected at their ends so as to provide fluid communication between each tube. Such low profile extrusions are preferably formed
15 from aluminum, although other conventional metals or metal alloys may also be used. The micro tubes can have a diameter from about .0625 inches to about .5 inches, but can also have significantly smaller diameters.

Such low profile extrusions can currently be manufactured
20 with a profile, or height, as low as about 0.05 inches and with tubes of varying inner diameters. Of course, future advances may allow such low profile extrusions to be manufactured with an even smaller profile. Such low profile extrusions have been conventionally used in heat exchanger

applications in the automotive industry, and are commercially available in strip form (having a generally rectangular geometry) or coil form (a continuous strip coiled for efficient transport). Preferred low profile extrusions are sold by Thermalex, Inc. of Montgomery, Alabama. A brochure entitled "Thermalex, Inc. -- Setting A Higher Standard in Aluminum Extrusions" (hereinafter the "Thermalex Brochure") provides additional detail regarding the Thermalex low profile extrusions and is incorporated herein by reference. U.S. Patent No. 5,342,189, which is incorporated herein by reference, provides additional detail regarding an extrusion die for making such low profile extrusions. U.S. Patent No. 5,353,639, which is incorporated herein by reference, provides additional detail regarding a method and apparatus for sizing a plurality of micro extruded tubes used in such low profile extrusions.

SUMMARY

In one embodiment, the present invention generally comprises a low profile extrusion, an inlet end cap, an inlet tube, an outlet end cap, an outlet tube, a heat transfer fluid, a means for circulating the heat transfer fluid, and means for removing heat from the heat transfer fluid. The low profile extrusion has a plurality of micro tubes with micro

5 tube inlets and micro tube outlets, and an extrusion surface adapted for receiving heat from at least one heat generating component. The inlet end cap interconnects the micro tube inlets in fluid communication and connects the micro tube inlets in fluid communication with the inlet tube. The outlet end cap interconnects the micro tube outlets in fluid communication and connects the micro tube outlets in fluid communication with the outlet tube. The means for circulating the heat transfer fluid circulates the fluid through the inlet tube, inlet end cap, the plurality of micro tubes in the low profile extrusion, the outlet end cap, and the outlet tube.

BRIEF DESCRIPTION OF THE DRAWINGS

15 A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

20 FIG. 1 is a schematic illustration of the present invention, shown as a circulation cooling apparatus for removal of heat from certain heat generating components;

FIGS. 2 and 3 are schematic illustrations of another embodiment of the present invention, shown as the

heat pipe type cooling apparatus for removal of heat from certain heat generating components;

FIG. 4 is a schematic illustration of another embodiment of the present invention, shown as heat transfer component of a recirculatory system;

FIG. 5A is a schematic illustration of another embodiment of the present invention, shown as a liquid to liquid manifold cooling apparatus;

FIG. 5B is a schematic illustration of another embodiment of the present invention, shown as a liquid to air manifold cooling apparatus;

FIG. 5C is a schematic illustration of another embodiment of the present invention, shown as an air to air manifold cooling apparatus;

FIG. 6 is a is a schematic illustration of a method and apparatus for manufacturing heat pipes according to an embodiment of the present invention;

FIG. 7 is a schematic illustration of another embodiment of the present invention, shown as heat pipe base/fin cooling apparatus; and

FIG. 8 is a schematic illustration of another embodiment of the present invention, shown as a base/heat pipe fin cooling apparatus.

DETAILED DESCRIPTION

The preferred embodiments of the present invention and their advantages are best understood by referring to Figures 1-8 of the drawings, like numerals being used for like and corresponding parts of the various drawings. The present invention is illustrated herein by example, and various modifications may be made by a person of ordinary skill in the art.

Figure 1 is a schematic illustration of a first preferred embodiment of the present invention showing a cooling apparatus 10 used for removing heat from certain heat generating components 12 mounted on a printed circuit board 14. The printed circuit board 14 may be housed in a host electronic device (not shown) such as computer, a laptop or notebook computer, or other electronic equipment. Due to the ongoing miniaturization of such host electronic devices, the heat generating components 12 are often located in an area of the printed circuit board 14 and of the host electronic device where space is extremely limited, especially in the "z", or height dimension.

The cooling apparatus 10 generally includes a conventional liquid-to-air heat exchanger 16, an inlet tube 18, a low profile extrusion 20, an outlet tube 22, a conventional pump 24, and tubing 26. The low profile extrusion

20 has a plurality of micro tubes 21, each micro tube 21 having a micro tube inlet 21a and a micro tube outlet 21b. The extrusion 20 is preferably formed with a flat surface on its bottom side 20a for contacting heat generating components 12, and may be formed with external fins on its top side 20b to maximize heat transfer, if space allows. Extrusion 20 is also preferably formed with at least one solid channel (not shown) for mounting to printed circuit board 14. Conventional thermal interface material (not shown) is preferably provided between low profile extrusion 20 and heat generating components 12.

The micro tube inlets 21a of the micro tubes 21 in the extrusion 20 are interconnected in fluid communication, and to the inlet tube 18, by an inlet end cap 28a. Similarly, the micro tube outlets 21b of the micro tubes 21 in the extrusion 20 are interconnected in fluid communication, and to the outlet tube 22, by an outlet end cap 28b. The heat exchanger 16 may contain a fluid reservoir (not shown) therein for housing a fluid such as water, glycol, alcohol, or other conventional refrigerants. In this case, fluid from the heat exchanger 16 is circulated through the inlet tube 18, the low profile extrusion 20, the outlet tube 22, and the tubing 26 via the pump 24. Alternatively, the entire cooling apparatus

10 may be evacuated and charged with fluid which is then circulated via the pump 24.

During operation of the host electronic device, heat generated by heat generating components 12 is transferred from heat generating components 12 to low profile extrusion 20, to the fluid circulating within low profile extrusion 20, and then to heat exchanger 16. Heat exchanger 16 removes the heat from the fluid in a conventional manner. Preferably, an airflow 30 is passed over heat exchanger 16 to aid in such heat removal. Cooling apparatus 10 thus efficiently removes heat from a limited space, low profile area within the host electronic device (the location of low profile extrusion 20) to an area where it can be removed at a more convenient location and envelope (the location of heat exchanger 16).

Figures 2 and 3 are schematic illustrations of a second preferred embodiment of the present invention showing a cooling apparatus 40 used for removing heat from heat generating components 12 on printed circuit board 14. Referring first to Figure 2, cooling apparatus 40 generally comprises a low profile extrusion 42 manufactured as a heat pipe capable of phase change heat transfer. A preferred method of making a low profile heat pipe extrusion 42 is described in greater detail hereinbelow. The low profile heat pipe extrusion 42 is preferably formed with micro tubes 41,

each micro tube 41 having a conventional wick structure such as internal fins, grooved inner sidewalls, or metal screens, so as to maximize their heat transfer capability via capillary action.

5 To form a heat pipe, the micro tubes 41 of the low profile heat pipe extrusion 42 are evacuated and then charged with a fluid such as water, glycol, alcohol, or other conventional refrigerants before sealing the ends 41a and 41b of the micro tubes 41. As is known in the art, a heat pipe
10 generally has an effective thermal conductivity of several multiples higher than that of a solid rod. This increase in efficiency is due to the fact that the phase change heat transfer coefficients are high compared to the thermal conductivity of conventional materials.

15 The low profile heat pipe extrusion 42 is preferably formed into a first portion 44 for contacting heat generating components 12 and a raised second portion 46. First portion 44 and second portion 46 are preferably substantially similar in construction to low profile extrusion 20 of Figure 1,
20 except end caps 28 are not required. First portion 44 acts as the evaporator section of the heat pipe, and second portion 46 acts as the condenser section of the heat pipe.

During operation of the host electronic device, heat generated by heat generating components 12 is transferred from

heat generating components 12 to first portion 44. This heat causes the liquid within the micro tubes 41 in first portion 44 to change to vapor, consuming some of the generated heat. Because the vapor is less dense than the surrounding liquid, the vapor and associated heat rise into the micro tubes 41 in second portion 46. Of course, heated liquid may also be transferred from first portion 44 to second portion 46 via the capillary action of the wick structures of the micro extruded tubes therein. In second portion 46, the vapor condenses into liquid onto the inner side walls of the micro extruded tubes 41. The heat generated by the condensation reaction, as well as any heat transferred via capillary action of the wick structure, is then transferred to air flow 48. Cooling apparatus 40 thus efficiently removes heat from a limited space, low profile area within the host electronic device (the location of first portion 44) to an area where it can be removed at a more convenient location and envelope (the location of second portion 46). Of course, if low profile heat pipe extrusion 42 is formed with internal wick structures, it is not necessary that second portion 44 be raised from, or higher than, first portion 42.

Referring now to Figure 3, low profile heat pipe extrusion 42 is shown in operation with a conventional thermoelectric cooler (TEC) 50 in contact with one of heat

generating components 12. A preferred TEC is sold by Marlow Industries, Inc. of Dallas, Texas. TEC 50 facilitates the heat transfer between the heat generating component 12 and first portion 44 of low profile heat pipe extrusion 42, and thus is preferred for use with heat generating components 12 that have high power densities.

Figure 4 is a schematic illustration of a third preferred embodiment of the present invention showing a cooling apparatus 60 used for removing heat from a fluid 62, such as water, glycol, alcohol, or other conventional refrigerants. Fluid 62 is then used to cool conventional heat generating components, such as heat generating components 12 of printed circuit board 14. By way of example, cooling apparatus 60 may be used in place of conventional heat exchanger 16 in Figure 1.

Cooling apparatus 60 generally comprises a low profile extrusion 64, an inlet end cap 63a, an inlet tube 66, an outlet end cap (not shown), an outlet tube (not shown), thermoelectric coolers 52, and conventional bonded fin heat sinks 68 and 70. The low profile extrusion 64 is preferably substantially similar in construction to low profile extrusion 20 of Figure 1, with a plurality of micro tubes (not shown) having a micro tube inlet and a micro tube outlet (not shown). The micro tube inlets of the micro tubes in the extrusion 64

are interconnected in fluid communication, and to the inlet tube 66, by the inlet end cap 63a. Similarly, the micro tube outlets of the micro tubes in the extrusion 64 are interconnected in fluid communication, and to the outlet tube, by an outlet end cap.

The low profile extrusion 64 preferably has generally flat bottom and top surfaces for contact with thermoelectric coolers (TEC) 52. The conventional bonded fin heat sink 68 is coupled to TECs 52 on the top surface of low profile extrusion 64, and the conventional bonded fin heat sink 70 is coupled to TECs 52 on the bottom surface of low profile extrusion 64.

In operation, the low profile extrusion 64 serves as a manifold, and the TECs 52 remove heat from fluid 62 flowing through the micro tubes of the low profile extrusion 64. This removed heat is transferred from TECs 52 to bonded fin heat sinks 68 and 70, which dissipate the heat to atmosphere in a conventional manner. Preferably, airflows 72 and 74 pass over and through heat sinks 68 and 70 to facilitate such heat dissipation.

Low profile extrusion 64 has a smaller size and mass than conventional heat exchanger manifolds. For example, a conventional manifold has a minimum profile, or height, in the "z" direction of about 0.75 inches, and low profile extrusion 64 may have a profile as low as about 0.1 inches. The reduced

mass of low profile extrusion 64 is believed to produce a cooling apparatus 60 with a near zero time constant, increasing startup performance and temperature control. Therefore, cooling apparatus 60 is especially advantageous in applications involving lasers. The wavelength of a laser beam, and thus beam properties, is strongly influenced by temperature, and the tighter temperature control believed to be provided by cooling apparatus 60 is extremely beneficial.

Figures 5A, 5B, and 5C are schematic illustrations of fourth, fifth, and sixth preferred embodiments of present invention. Figure 5A shows a cooling apparatus 80 having a plurality of low profile extrusions 64 and TECs 52 arranged in a serial fashion. A TEC 52 is disposed between, and is in contact with, each of the extrusions 64. Only one low profile extrusion 64 and one TEC 52 is numbered in Figure 5A for clarity of illustration. Fluid 62 enters each extrusion 64 via inlet 66 and exits each extrusion 64 via an outlet 82. In operation, TECs 52 remove heat from fluid 62 flowing through low profile extrusions 64. This removed heat is transferred to airflow 84 passing over cooling apparatus 80.

Figure 5B shows a cooling apparatus 90 having a plurality of low profile extrusions 64, TECs 52, and low profile heat pipe extrusions 92 arranged in a serial fashion. More specifically, a TEC 52 is disposed between, and is in contact

with, each low profile extrusion 64 and low profile heat pipe extrusion 92. Only one low profile extrusion 64, one TEC 52, and one low profile heat pipe extrusion 92 are numbered in Figure 5B for clarity of illustration. Each low profile heat pipe extrusion 92 is preferably substantially similar in construction to low profile heat pipe extrusion 42 of Figure 1, excluding raised portion 46. Fluid 62 enters each extrusion 64 via inlet 66 and exits each extrusion 64 via outlet 82. In operation, each TEC 52 removes heat from fluid 62 flowing through an adjacent low profile extrusion 64. This removed heat is transferred to the evaporator portion 92a of the adjacent low profile heat pipe extrusion 92. The heat is then transferred to the condenser portion 92b of the low profile heat pipe extrusion 92, as is explained hereinabove in connection with low profile heat pipe extrusion 42 of Figures 2 and 3. An airflow 84 passing over cooling apparatus 90 dissipates heat from each condenser portion 92b of each low profile heat pipe extrusion 92.

Figure 5C shows a cooling apparatus 100 having a plurality of TECs 52 and low profile heat pipe extrusions 92 arranged in a serial fashion. More specifically, a TEC 52 is disposed between, and is in contact with, each low profile heat pipe extrusion 92, and the "free end" of adjacent low profile heat pipe extrusions 92 extend in opposite directions.

Only one TEC 52 and two low profile heat pipe extrusions, 92' and 92", are numbered in Figure 5C for clarity of illustration. In operation, a hot airflow 102 flows over each evaporator portion 92a of low profile heat pipe extrusions 92'. This heat is transferred from evaporator portion 92a to condenser portion 92b of extrusion 92', as is explained hereinabove in connection with low profile heat pipe extrusion 42 of Figures 2 and 3. Condenser portion 92b of extrusion 92' is in contact with TEC 52. The TEC 52 removes heat from condenser portion 92b of extrusion 92' and transfers it to evaporator portion 92a of low profile heat pipe extrusion 92". This heat is then transferred from evaporator portion 92a to condenser portion 92b of extrusion 92". Cold airflow 104 passing over condenser portions 92b of each extrusion 92" dissipates heat from cooling apparatus 100.

Cooling apparatus 80, 90, and 100 have the same applications and advantages of cooling apparatus 60 described hereinabove. As will be appreciated by one skilled in the art, cooling apparatus 60, 80, and 90 may also be operated as heating apparatus by using thermoelectric coolers (TECs) 52 to heat, rather than to cool, a fluid.

Figure 6 is a schematic illustration of a method and apparatus for manufacturing heat pipes according to a seventh preferred embodiment of the present invention. As noted

hereinabove, the preferred apparatus and method may be utilized to make low profile heat pipe extrusions 42 and 92 of Figures 2, 3, 5B, and 5C. However, the preferred apparatus and method may also be utilized to make extruded hollow tubes
5 for other heat exchangers and heat pipes.

Apparatus 110 generally includes an oven 112 having a sealable housing. A vacuum station 114 and a fluid charging station 116 are in fluid communication with oven 112. A coil 118 is disposed within a portion of oven 112 on a conventional
10 automatic feed system. Coil 118 may be a coil of hollow tubing, a coil of low profile extrusion, or a coil of other conventional extrusion having a series of extruded hollow tubes therein. An ultrasonic welder/sealer is also disposed in oven 112. A preferred ultrasonic welder/sealer is the
15 Ultraseal® series sold by American Technology, Inc. of Shelton, Connecticut. A brochure entitled "Ultraseal®-20 20kHz Portable Ultrasonic Metal Tube Sealer" (hereinafter the "Amtech Brochure") provides additional information regarding the Ultraseal® series of ultrasonic welder/sealers and is
20 incorporated herein by reference.

In a conventional process, the first step is actually forming and cutting the heat exchanger, heat pipe, or extruded tubes into the desired configuration. Next, this preformed system is evacuated and charged with a fluid such as water,

glycol, alcohol, or other conventional refrigerants. The system is then sealed, completing the process. Conventional processes are expensive because they are labor intensive and require long setup times for different configurations of heat exchangers, heat pipes, or extruded tubes.

However, apparatus 110 may be used to efficiently and economically produce heat exchangers, heat pipes, and extruded tubes, including low profile extrusions, according to the following preferred process. First, coil 118 is placed within oven 112 on the automatic feed system. Second, coil 118 is evacuated using vacuum station 114. Preferably, coil 118 is pulled down to a vacuum of about 10^{-7} torr for a period of approximately twenty four hours. Third, coil 118 is charged with a known amount of fluid, such as water, glycol, alcohol, or other conventional refrigerants, using charging station 116. Fourth, oven 112 heats coil 118 until all of the fluid is in the vapor phase, and the vapor fills the interior of coil 118 evenly. Fifth, using the automatic feed system, the heated and charged coil 118 is reeled out, and is crimped, sealed, and cut into desired lengths using ultrasonic welder/sealer 120. When forming tube heat pipes, ultrasonic welder/sealer 120 preferably canoe crimps the extrusions. Finished product is collected within container 122. In this manner, heat exchangers, heat pipes, and extruded tubes,

including low profile extrusions, are formed while charged with fluid, significantly reducing the setup time and vacuum expense over conventional processes.

Figure 7 illustrates another embodiment of the present invention, showing a cooling apparatus 210 used for removing heat from heat generating components 12 on printed circuit board 14. The cooling apparatus 210 comprises a low profile extrusion 220 manufactured as a heat pipe capable of phase change heat transfer. The low profile heat pipe extrusion 220 is formed having a plurality of micro tubes 230, preferably having therein conventional wick structure inside such as internal fins, grooved inner side walls, or metal screens, so as to maximize there heat transfer capability via capillary action. The micro tubes 223 of the low profile heat pipe extrusion 220 are evacuated and then charged with a fluid such as water, glycol, alcohol, or other conventional refrigerants, before the ends of the micro tubes are sealed.

The low profile heat pipe extrusion 220 has a first surface 221 for engaging the heat generating components 12 and receiving heat transfer therefrom. On a second surface 222 of the low profile extrusion 220, a conventional bonded fin heat sink 230 or plurality of cooling fins are mounted to the low profile extrusion 220. Preferably, the micro tubes 223 are disposed in a direction perpendicular to the fins 230 for

transfer of heat between each of the individual fins 230. The heat transfer between the individual fins 230 promotes the even distribution of heat across each of the individual fins 230. However, the micro tubes 223 can be oriented for the transfer of heat along the length of the fins 230. Additionally, in one preferred embodiment, the micro extruded hollow tubes 223 in the low profile extrusion 220 are oriented for disbursing heat from the heat generating components 12 to areas of the low profile extrusion 220 which are not in contact with a heat generating components 12.

The use of the low profile extrusion 220 for transferring heat in the cooling apparatus 200 increases the effective surface area that heat is transferred from the heat generating components to the cooling fins 230. The resulting cooling apparatus is therefore smaller in size and lighter in weight for the same effective cooling attributes. In some embodiments, the present invention can decrease the weight of an apparatus for cooling a heat generating component by as much as 50% over traditional fins mounted via a metal plate.

Figure 8 illustrates another embodiment of the present invention, showing a cooling apparatus 250 used for removing heat from heat generating components 12 on printed circuit board 14. The cooling apparatus generally comprises a base 260 and a plurality of low profile extrusion fins 270. The

base 260 has a first side 261 for heat transfer between the cooling apparatus 250 and heat generating components 12. The base 260 also has a second surface 262 for mounting the low profile extrusion fins 270.

5 The low profile extrusion fins 270 are low profile extrusions manufactured as a heat pipe capable of phase change heat transfer. The low profile extrusion heat piping 270 are preferably formed with a plurality of micro tubes 273 each preferably having a conventional wick structure such as
10 internal fins, grooved inner side walls, or metal screens, so as to maximize the heat transfer capability via capillary action. The micro tubes 273 of the low profile extrusion heat piping 270 are evacuated and then charged with a fluid such as water, glycol, alcohol, or other conventional refrigerants,
15 before the micro tubes 273 are sealed.

 A first end 271 of the low profile extrusion fins 270 is mounted to the second surface 262 of the base 260 with a second end 272 extending outwardly therefrom. The plurality of low profile extrusion fins 270 are preferably mounted in
20 rows for convection heat transfer to the surrounding environment. In one embodiment, the base 260 can also be formed from a low profile extrusion similar to the low profile extrusion 220 in FIG. 7.

The use of the heat pipe type low profile extrusion fins 270 in the cooling apparatus 250 increases the effective surface area in which heat is transferred from the heat generating components to the surrounding environment via the base 260. The resulting cooling apparatus is therefore smaller in size and lighter in weight for the same effective cooling attributes.

It is believed that the operation and construction of the present invention will be apparent from the foregoing description of a preferred embodiment. While the device shown is described as being preferred, it will be obvious to a person of ordinary skill in the art that various changes and modifications may be made therein without departing from the spirit and scope of the invention as defined in the following claims. Therefore, the spirit and the scope of the appended claims should not be limited to the description of the preferred embodiments contained herein.

WHAT IS CLAIMED IS:

1. A cooling apparatus for removing heat from at least one heat generating component, said cooling apparatus comprising:

5 a low profile extrusion having an extrusion surface adopted for receiving heat from the at least one heat generating component and a plurality of micro tubes with a micro tube inlet and a micro tube outlet;

an inlet tube;

10 and inlet end cap interconnecting the micro tube inlets in fluid communication and connecting the micro tube inlets in fluid communication with said inlet tube;

an outlet tube;

15 an outlet end cap interconnecting the micro tube outlets in fluid communication and connecting the micro tube outlet in fluid communication with said outlet tube;

a heat transfer fluid;


20 means for circulating said heat transfer fluid through said inlet tube, said inlet end cap, the plurality of micro tubes of said low profile extrusion, said outlet end cap, and said outlet tube; and

means for removing heat from said heat transfer fluid.

ABSTRACT

A cooling apparatus has a low profile extrusion with a plurality of micro tubes extended there through. In the caps interconnect the ends of the micro tubes in fluid communications and to inlet and outlet tubes. The low profile extrusion is placed into thermal connection with heat producing components. A heat transfer fluid is circulated through the micro tubes of the low profile extrusion, and a heat exchanger removes the heat from the heat transfer fluid.



27897-37


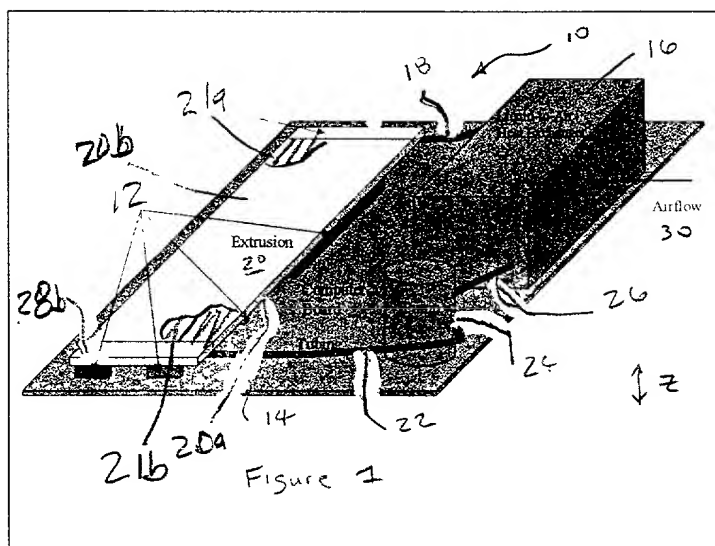


27897-37


1/6

27337-37 2/15

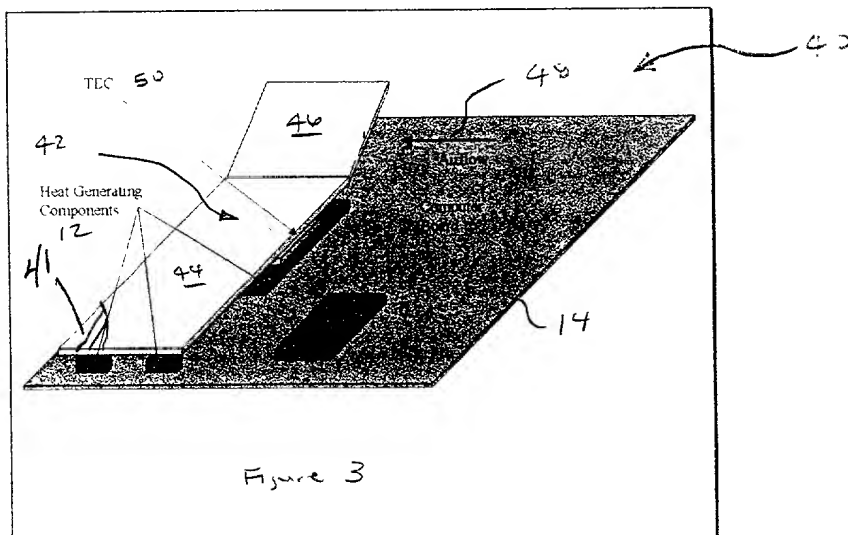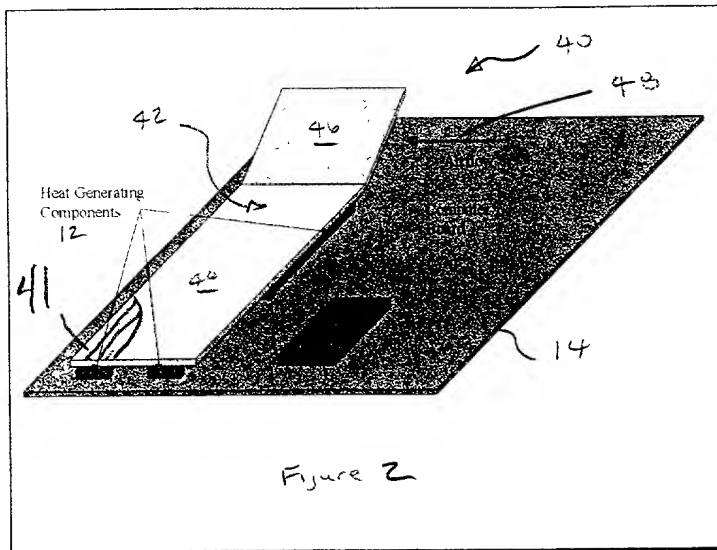

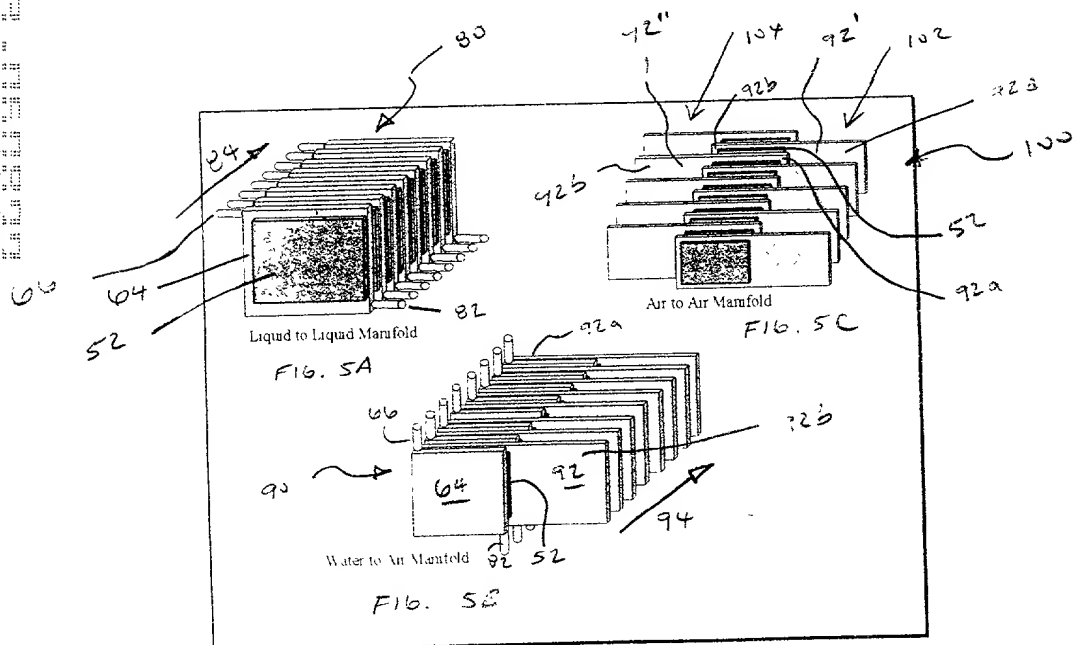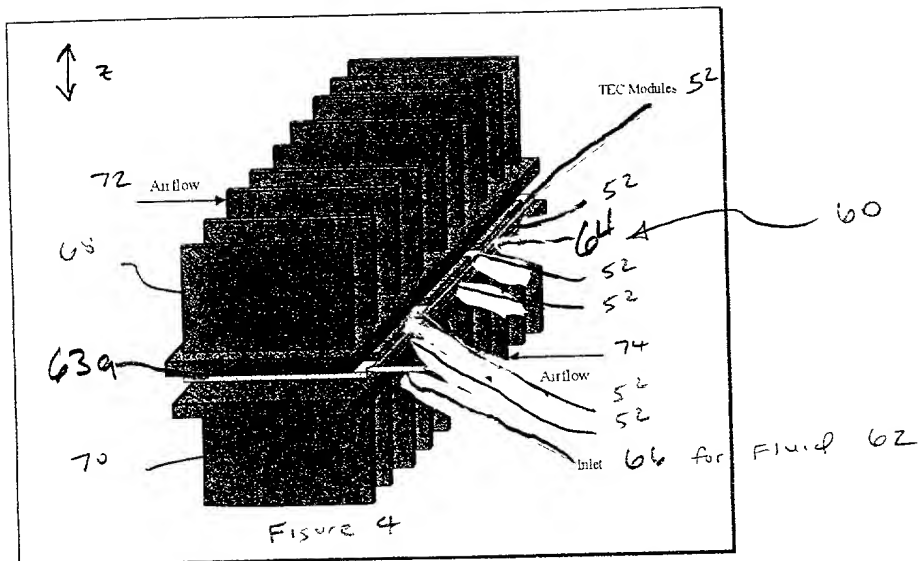

2025 RELEASE UNDER E.O. 14176

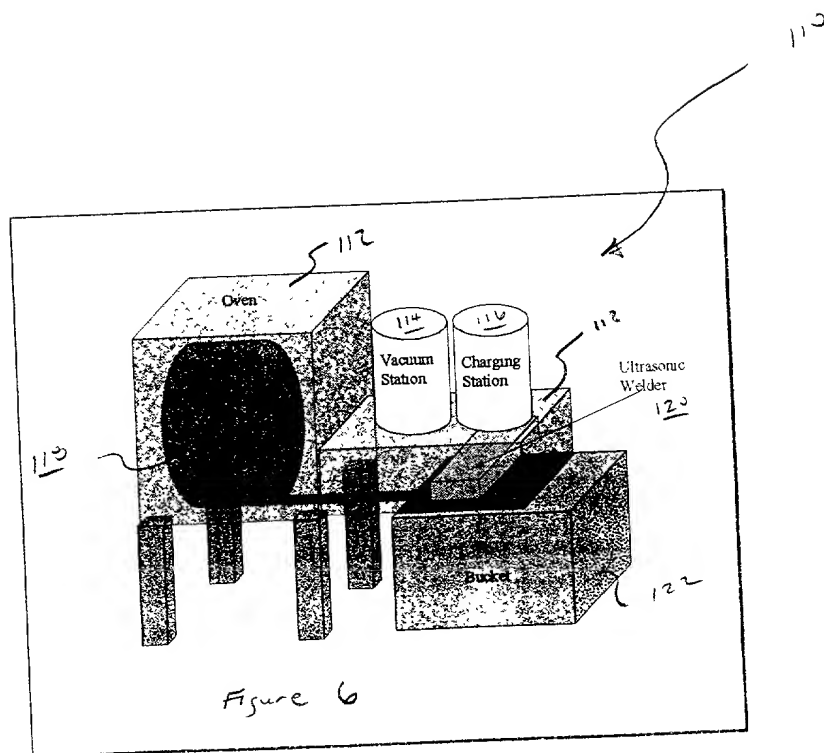

27391-37
4/6


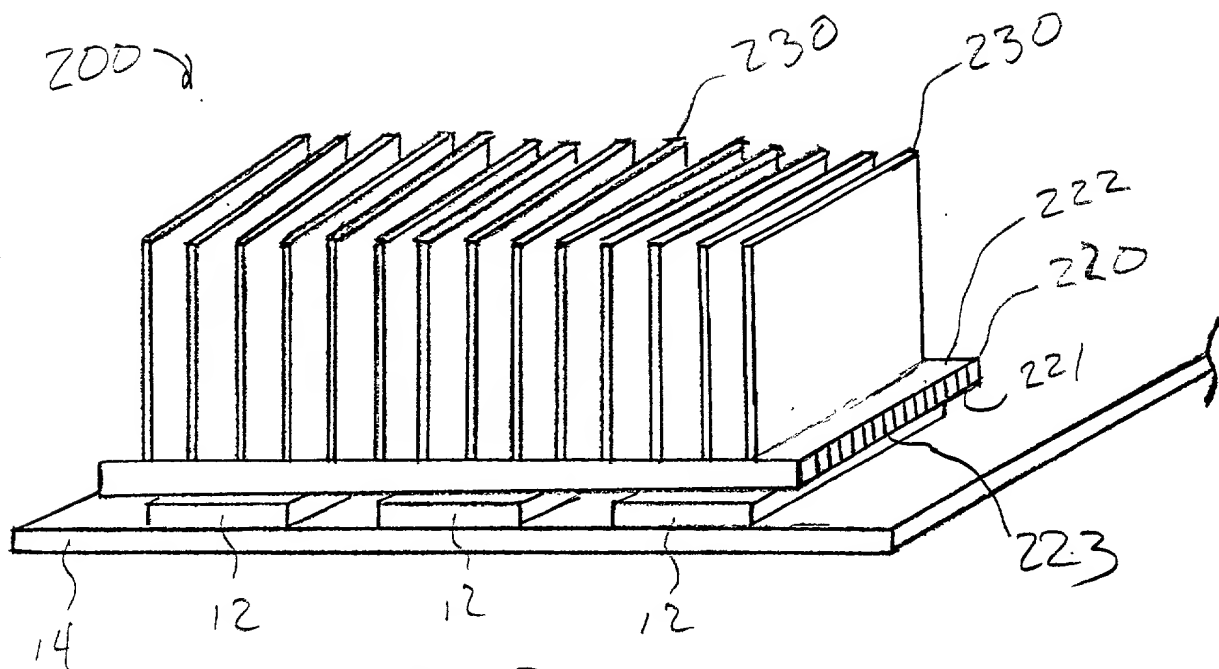


FIG. 7

27889-37
516

66999-666660

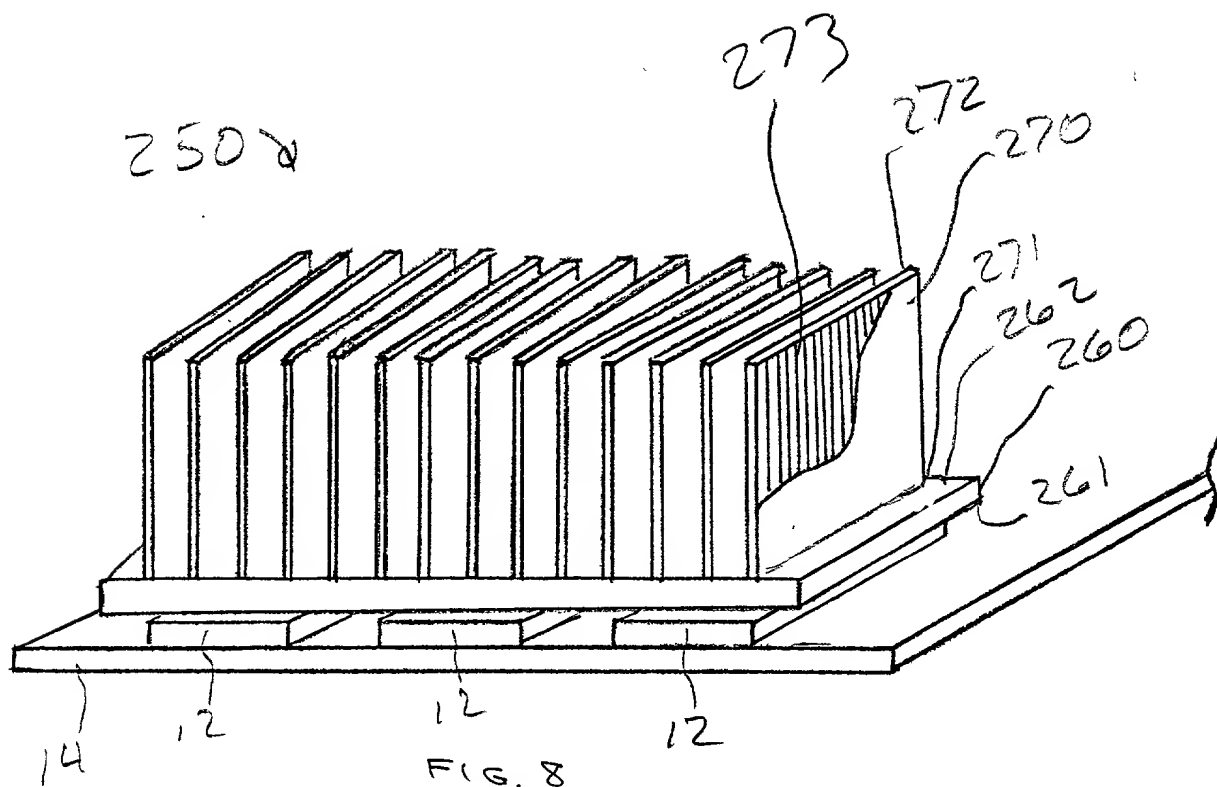

27889-37
6/6